

## DTV6-1S



Redundancy power supply (optional)

### Product Outline


DTV head-end processor is the new generation of intelligent headend processing equipment. This 1-U case comes with 6 independent module slots. Each module can be configured individually based on the applications including encoding, decoding, trans-coding, multiplexing, descrambling and modulating processing and the combination of all these functions. It supports multiple input and output interfaces and signal formats. With its powerful performance and low cost, DTV6-1S is especially adequate for the new generation CATV system.

### Key Features

- Support flexible combination of different type of modules
- Support up to 6 modules
- Support 1 ASI output (MPTS2)
- Support 2 GE output, 512 SPTS (UDP, RTSP/RTP) output from GE1, 8 MPTS (UDP,RTP) output from GE2, Unicast/Multicast, RJ45/SFP interface
- Support Web management, Updates via web

## Module Specifications:

### 4 ASI/IP Multiplexing Module

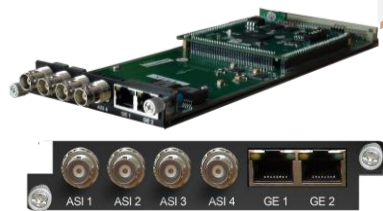

DX504

#### Module Specifications:

ASI inputs/outputs: 4 ASI bi-direction, BNC 75Ω

IP inputs/outputs: 2 100/1000M Ethernet Port

Re-multiplexing: PID remapping, PCR correction, generate PSI/ SI table automatically

Stream In: maximum 4 ASI input, 256×2 IP input

Stream Out: maximum 4 ASI output, 4 IP output

### 5 ASI Multiplexing Module



DX505

#### Module Specifications:

ASI inputs/outputs: 5 ASI bi-direction, BNC 75Ω

Stream in: maximum 5 ASI input

Re-multiplexing: PID remapping, PCR correction, generate PSI/ SI table automatically

Stream out: maximum 5 ASI output

### 4 CVBS Encoding Module



**DX214**

#### **Module Specifications:**

Input: 4 CVBS video, 4 Stereo Audio (BNC 75Ω)

#### **Video Encoding:**

Video format: MPEG-2 (4:2:0)

Image format: PAL, NTSC SD signal

Input resolution: 720×480\_60i, 544×480\_60i, 352×480\_60i, 352×240\_60i, 320×240\_60i, 176×240\_60i, 76×120\_60i, 720×576\_50i, 704×576\_50i, 640×576\_50i, 352×288\_50i, 320×288\_50i, 176×288\_50i, 176×144\_50i

GOP structure: IBBPB

Video bitrate: 0.1Mbps~8Mbps each channel

#### **Audio Encoding:**

Audio format: MPEG-1 Layer 2, DD AC3 (2.0)

Sampling rate: 48KHz

Resolution: 24-bit

Audio bitrate: 128Kbps, 192kbps, 256kbps, 320kbps, 384kbps each channel

### 2 HDMI Encoding/Transcoding Module



**DX202A**

#### **Module Specifications:**

Input: 2\*HDMI, 2\*BNC for CC (Closed Caption) input

#### **Video Encoding:**

Video format: MPEG2 & MPEG4 AVC/H.264

Input resolution:

1920\*1080\_60i, 1920\*1080\_50i, 1280\*720\_60p, 1280\*720\_50P  
720\*480\_60i, 720\*576\_50i

Rate control mode: CBR/VBR

Aspect ratio: 16:9, 4:3

Video bitrate: 0.5~19.5Mbps for H.264 encoding  
1~19.5Mbps for MPEG-2 encoding

Support CC (closed caption)

#### **Audio Encoding:**

Audio format: MPEG1 Layer II, MPEG2-AAC, MPEG4-AAC,

Dolby Digital AC3 (2.0) encoding (Optional); AC3 (2.0/5.1) passthrough

Sampling rate: 48KHz

Audio bitrate: 64Kbps-320kbps each channel

#### **Video Tanscoding:**

2\*MPEG2 HD → 2\*MPEG2/H.264 HD; 2\*MPEG2 HD → 2\*MPEG2/H.264 SD;


2\* H.264 HD → 2\*MPEG2/H.264 HD; 2\* H.264 HD → 2\*MPEG2/H.264 SD;

4 \*MPEG2 SD → 4 \*MPEG2/H.264 SD; 4\* H.264 SD → 4 \*MPEG2/H.264 SD

#### **Audio Tanscoding:**

MPEG-1 Layer 2, AAC and AC3 any-to-any

## 2 SDI Encoding/Transcoding Module

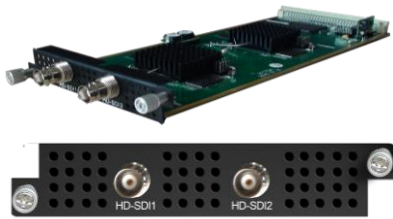

**DX202A-D**

### Module Specifications:

Input: 2\*HD-SDI

### Video Encoding:

Video format: MPEG2 & MPEG4 AVC/H.264

Input resolution:

1920\*1080\_60i, 1920\*1080\_50i, 1280\*720\_60p, 1280\*720\_50P  
720\*480\_60i, 720\*576\_50i

Rate control mode: CBR/VBR

Aspect ratio: 16:9, 4:3

Video bitrate: 0.5~19.5Mbps for H.264 encoding;  
1~19.5Mbps for MPEG-2 encoding

Support CC (closed caption)

### Audio Encoding:

Audio format:

MPEG1 Layer II, MPEG2-AAC, MPEG4-AAC,

Dolby Digital AC3 (2.0) encoding (Optional)

Sampling rate: 48KHz

Audio bitrate: 64Kbps-320kbps each channel

### Video Tanscoding:

2\*MPEG2 HD → 2\*MPEG2/H.264 HD; 2\*MPEG2 HD → 2\*MPEG2/H.264 SD;


2\* H.264 HD → 2\*MPEG2/H.264 HD; 2\* H.264 HD → 2\*MPEG2/H.264 SD;

4 \*MPEG2 SD → 4 \*MPEG2/H.264 SD; 4\* H.264 SD → 4 \*MPEG2/H.264 SD

### Audio Tanscoding:

MPEG-1 Layer 2, AAC and AC3 any-to-any

## 4 HDMI Encoding Module

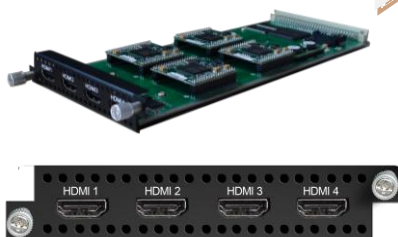

**DX224**

### Module Specifications:

Input: 4\*HDMI

### Video Encoding:

Video format: MPEG-4 AVC/H.264

Input resolution:

1920×1080\_60P, 1920×1080\_50P, 1920×1080\_60i, 1920×1080\_50i,  
1280×720\_60P, 1280×720\_50P, 720×576\_50i, 720×480\_60i

Support HD (1080i/720p\_50/60) to SD (576p/480p\_25/30) resolution downscale conversion

GOP structure: IBBP

Video bitrate: 0.8Mbps~19Mbps each channel

Rate Control: CBR/VBR

### Audio Encoding:

Audio format: MPEG1 Layer II, (MPEG-2 AAC, MPEG-4 AAC Optional), AC3 passthrough


Sampling rate: 48KHz

Resolution: 24-bit

Audio bitrate: 64Kbps~320Kbps each channel

Audio Gain Control: 0-400

## 2 IP Transcoding Module

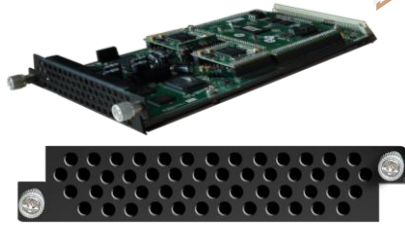

**DX202**

### Module Specifications:

Resolution: 480i, 576i, 720P@50, 720P@60, 1080i@50, 1080i@60, 1080P@50, 1080P@60

### Video Tanscoding:

2\*MPEG-2/ H.264/ AVS/AVS+ HD/SD → 2\* H.264 HD/SD

### AudioTanscoding:


MPEG-1 Layer II, LC/HE-AAC, AC3, DRA → MPEG-1 Layer II, LC/HE-AAC

Audio bitrate: 64Kbps-384Kbps

Rate Mode: CBR/VBR

GOP Struct: IBBP, IPPP, IBP

## 2 HD-SDI Decoding Module

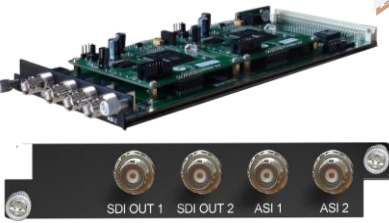

**DX702**

### Module Specifications:

ASI input/output: 2 ASI bi-direction, BNC 75Ω

Decoding:

Video/Audio Out: 2 HD/SD SDI output Video Format: MPEG-2, MPEG-4 AVC/H.264

Resolution: 480i,480p,576i,576p,720p@50/59.94/60,1080i@50/59.94/60

Chroma: 4:2:0

Audio Format: MPEG1 Layer2, LC-AAC, HE-AAC, AC3 (2.0/5.1), AC3

Passthrough,

Support Dual Audio Out

Support CC/Subtitle

## 16/32 QAM Modulating Module



**DX316/DX332**

### Module Specifications:

Data input: 512×2 IP input over UDP/RTP, 2 GE Ports (RJ45/SFP)

Data output: 16 or 32 IP output over UDP/RTP/RTSP, unicast/multicast, 2 GE Ports (RJ45/SFP)

Trans Rate: Max 840Mbps/GE Port

RF output (F type): 16/32 channels of multiplexing, scrambling and modulation.

### Multiplexing:

Maximum PID Remapping: 180 input per channel

Function: PID remapping (automatically or manually), Accurate PCR adjusting, generate PSI/SI table automatically

### Scrambling:

Maximum simulcrypt CA: 4

Standard: ETR289, ETSI 101 197, ETSI 103 197

Connection: Local/remote connection

### Modulation:

Standard: EN300 429/ITU-T J.83A/B (DVB-C)

MER: ≥40db

RF frequency: 50~960MHz, 1KHz step

RF output level: -20~+10dbm (87~117 dbμV), 0.1db step for all carriers

Symbol Rate: 5.0Msps~7.0Msps, 1ksps stepping

Constellation: 16/32/64/128/256QAM

DX316 Output: 16 non-adjacent carrier outputs within 192M bandwidth

DX332 Output: 32 non-adjacent carrier outputs within 384M bandwidth

### 8 DVB-T/ATSC Modulating Module



**DX308T/DX308C**

#### Module Specifications:

Data input:

512×2 IP input over UDP/RTP, 2GE Ports (RJ45/SFP) —— DX308T

256 IP input over UDP/RTP, 2GE Ports (RJ45/SFP) —— DX308C

Data output: 8 IP output over UDP/RTP/RTSP, unicast/multicast, 2 GE Ports (RJ45/SFP)

Trans Rate: Max 840Mbps/GE Port

RF Output (F type): 8 non-adjacent carrier outputs within 192M bandwidth

#### Multiplexing:

Channel Number: 8 multiplexing channels

Maximum PID Remapping: 180 input per channel

Function: PID remapping (automatically or manually), Accurate PCR adjusting, generate PSI/ SI table automatically

#### Modulation: DX308T (8\*DVB-T)

Standard: ETSI EN300 744

MER:  $\geq 40\text{db}$

RF Frequency: 50~960MHz, 1KHz step

Constellation: QPSK/16QAM/64QAM

Bandwidth: 6/7/8 MHz

Trans mode: 2K/4K/8K

FEC: 1/2, 2/3, 3/4, 5/6, 7/8

RF Output Level: -20~+10dbm (for all carriers), 0.5db stepping

#### Modulation: DX308C (8\*ATSC)

Standard: ATSC A/53

MER:  $\geq 40\text{db}$

RF Frequency: 50~960MHz, 1KHz step

Constellation: 8VSB

Bandwidth: 6MHz

FEC: RS(208 188)+Trellis

RF Output Level: -20~+10dbm (for all carriers), 0.5db stepping

### 6 ISDB-Tb Modulating Module



**DX306I**

#### Module Specifications:

Data input: 32×6 IP input over UDP/RTP, 2 GE Ports (RJ45/SFP)

Data output: 6 IP output over UDP/RTP, unicast/multicast, 2 GE Ports (RJ45/SFP)

Trans Rate: Max 840Mbps/GE Port

RF output (F type): 6 channels of multiplexing and modulation.

#### Multiplexing:

Input Channel: 192

Maximum PID Remapping: 180 input per channel

Function: PID remapping (automatically or manually), Accurate PCR adjusting, generate PSI/ SI table automatically

#### Modulation:

Standard: ARIB STD-B31

Bandwidth: 6M

Guard Interval: 1/32, 1/16, 1/8, 1/4

Code rate: 1/2, 2/3, 3/4, 5/6, 7/8

RF frequency: 50~960MHz, 1KHz step

RF output level: -20dBm~+10dBm (87~117dB  $\mu\text{V}$ ), 0.1dB stepping

Constellation: QPSK, 16QAM, 64QAM

Transmission Mode: 2K, 4K, 8K

MER:  $\geq 40\text{dB}$



## 2 Tuner Descrambling Module



**DX902/DX912**

### Module Specifications:

Stream in: 2 Tuner input, F Type

DVB-CI: 2 independent common interface slots

Standard: DX902: DVB-S/S2; DX912: DVB-C

Tuner Section	DVB-S	Input Frequency: 950-2150MHz Symbol Rate: QPSK 1~45Mbauds Signal Strength: -65~ -25dBm FEC Demodulation: 1/2, 2/3, 3/4, 5/6, 7/8
	DVB-S2	Input Frequency: 950-2150MHz Symbol rate: QPSK/8PSK 1~45Msps 16APSK 1~45 Msps 32APSK1~32 Msps FEC Demodulation: 1/2, 2/3, 3/4,5/6,7/8, 4/5,5/6,8/9, 9/10
	DVB-C	Standard: J.83A(DVB-C), J.83B, J.83C Input Frequency: 30-960MHz Constellation: 16/32/64/128/256 QAM

Support Diseqc function (For DX902)

### Multiplexing:

Maximum PID Remapping: 256 input

Function: PID remapping (automatically or manually), Accurate PCR adjusting, generate PSI/ SI table automatically

### Descrambling:

CAM/CI Quantity: 2

BISS Mode: Mode 1, Mode E; up to 120Mbps (Optional as required)

## 4 FTA Tuner Module



**DX904/DX914/DX944**

### Module Specifications:

Stream in: 4 Tuner input, F Type

Standard: DX904: DVB-S/S2; DX914: DVB-C; DX944: DVB-T/T2

DVB-S	DVB-S2
Input Frequency: 950-2150MHz	950-2150MHz
Symbol Rate: QPSK 1~45 Msps	QPSK/8PSK 1~45 Msps, 16APSK 1~45 Msps, 32APSK1~32 Msps (16APSK&32APSK are optional as required)
FEC Demodulation:1/2, 2/3,3/4,5/6,7/8	1/2, 2/3,3/4,5/6,7/8,4/5,5/6,8/9, 9/10
Signal Strength: -65 ~ -25dBm	
Support Diseqc function (For DX904)	

DVB-C Standard: J.83A (DVB-C), J.83B, J.83C  
Input Frequency: 30-1000MHz  
Constellation: 16/32/64/128/256 QAM

DVB-T/T2: Standard: DVB-T/T2  
Input Frequency: 30 MHz~1000 MHz  
Bandwidth: 6M, 7M, 8M

### Multiplexing:

Maximum PID Remapping: 256 input

Function: PID remapping (automatically/ manually), Accurate PCR adjust



## Equipment Specifications:

### Base Unit Parameters

Dimension(W×L×H): 482mm×410mm×44mm
Approx weight: 8kg
Environment: 0~45℃(work); -20~80℃(Storage )
Power requirements AC 110V±10%, 50/60Hz, AC 220 ±10%, 50/60Hz
Power consumption : >20W